



www.stucchi.net



WELDING FUMES EXTRACTION



Stucchi 1950



www.stucchi.net



ST-ART C5/C10


Wheeled unit for suction and filtration of welding fumes.

TPOLOGY	mobile extractors
USAGE	welding fumes
DIMENSIONS	756 x 615 x 1069 (2760 with arm)
WEIGHT	140 Kg

ST-ART C5/C10


TECHNICAL DATA

MOTOR POWER	1.5 Hp (1.1 kW)
RPM	2800
VOLTAGE	400 v / 50 Hz / 3 Ph
CURRENT DRAW	2,3 Amp
FLOW RATE	1450 m³/h
ARM	Ø 150 mm - L. 3 m
NOISE	72 dB(A)
POWER	3 Ph + N + T

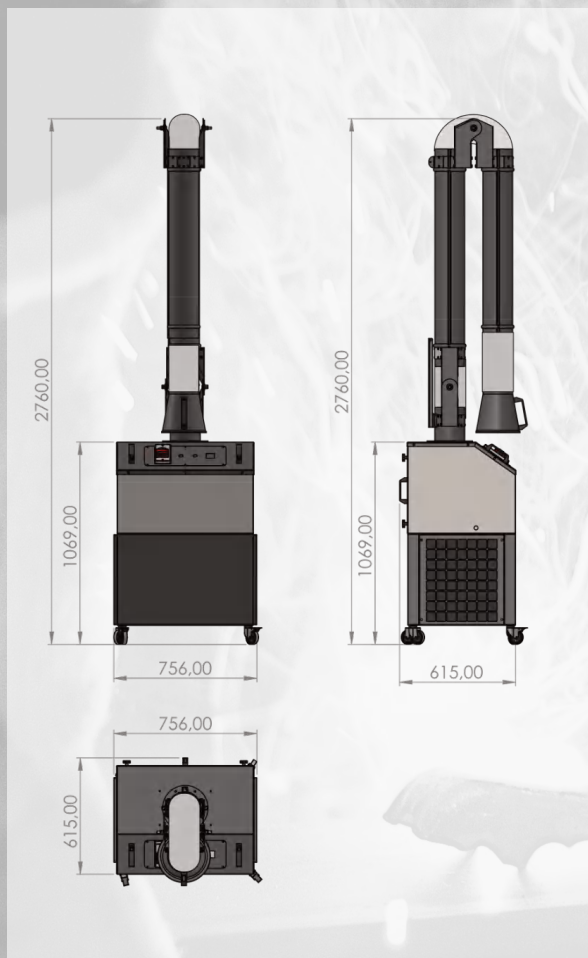

ST-ART C5/C10

FILTER DATA

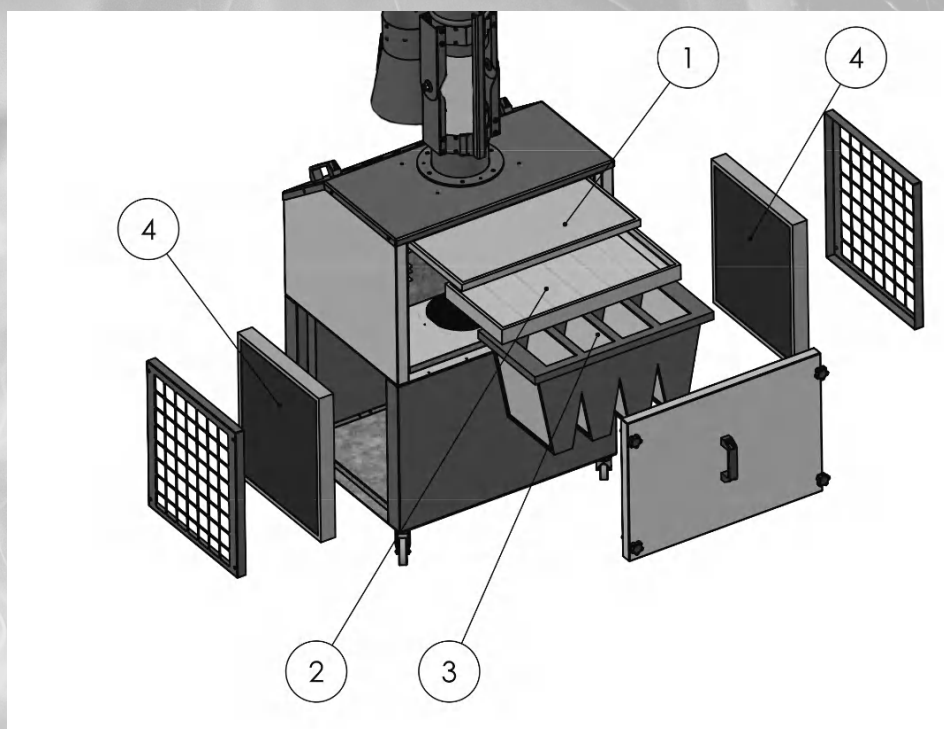

	ST-ART-C5	Ref. Drawing	Nr. Parts	Code
PREFILTER 1	STEEL MESH FILTER (G2 - EN779)	1	1	PRE-MA-01
PREFILTER 2	CORRUGATED FILTER (G4 - EN779)	2	1	PRE-M5-01
FILTER	POCKET FILTER (F9 - EN779)	3	1	FT-287-F9
FILTER CA	ACTIVATED CARBON FILTER (2 CELLS, 5 Kg IN TOTAL)	4	2	FCA-001

	ST-ART-C10	Ref. Drawing	Nr. Parts	Code
PREFILTER 1	STEEL MESH FILTER (G2 - EN779)	1	1	PRE-MA-01
PREFILTER 2	CORRUGATED FILTER (G4 - EN779)	2	1	PRE-M5-01
FILTER	POCKET FILTER (F9 - EN779)	3	1	FT-287-F9
FILTER CA	ACTIVATED CARBON FILTER (2 CELLS, 10 Kg IN TOTAL)	4	2	FCA-002



www.stucchi.net



ST-Action C5/C10


Wheeled unit for suction and filtration of welding fumes.

TPOLOGY	mobile extractors
USAGE	welding fumes
DIMENSIONS	777 x 578 x 720 (241l with arm)
WEIGHT	120 Kg

ST-Action C5/C10

TECHNICAL DATA


MOTOR POWER	1.5 Hp (1.1 kW)
RPM	2800
VOLTAGE	400 v / 50 Hz / 3 Ph
CURRENT DRAW	2,3 Amp
FLOW RATE	1450 m³/h
ARM	Ø 150 mm - L. 3 m
NOISE	73 dB(A)
POWER	3 Ph + N + T

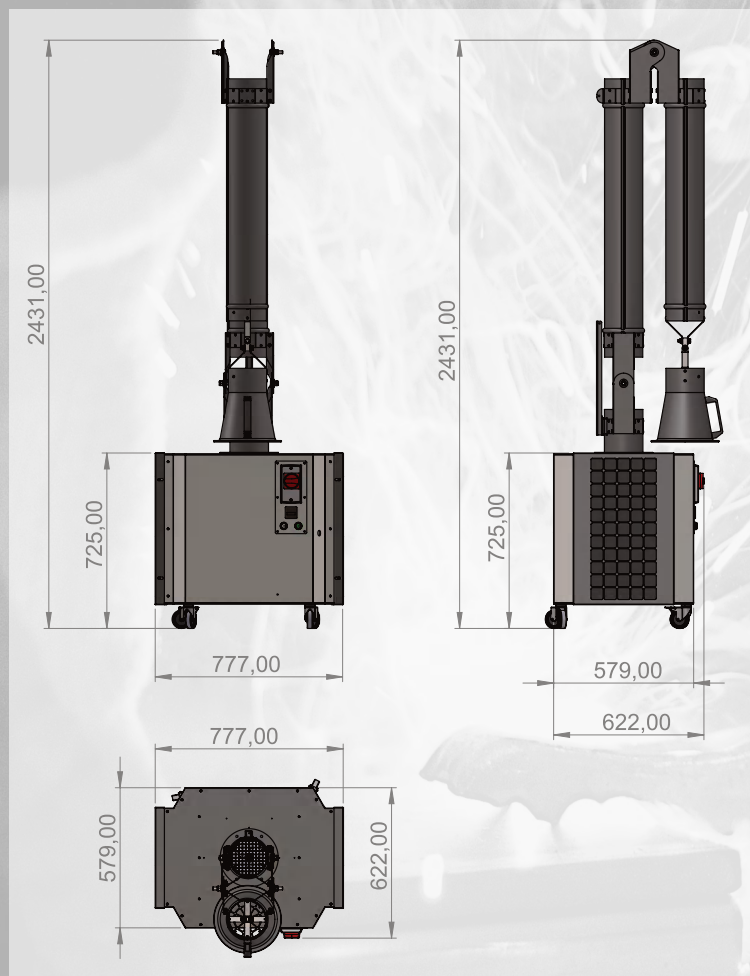

SUCTION ARM LENGTH 3 M.


CONTROL PANEL WITH
COUNTER AND SIGNAL
LIGHTS

FILTRATION SYSTEM
INCLUDING ACTIVATED
CARBON (5/10 kg)

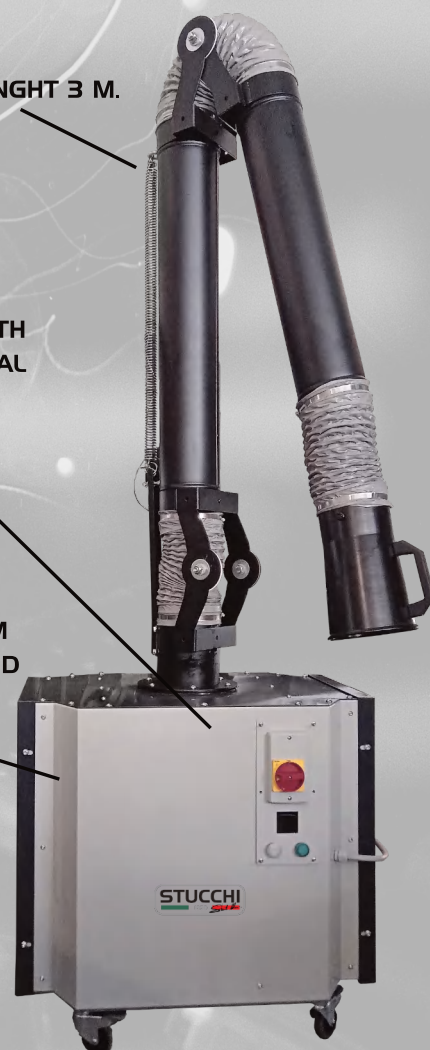


ST-Action C5/C10

FILTER DATA

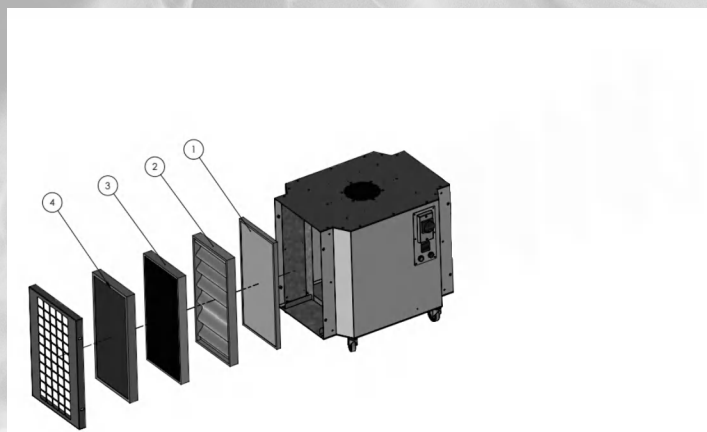

	ST-Action C5	Ref. Drawing	Nr. Parts	Code
Prefilter 1	Steel mesh filter (G2)	1	1	PRE-MA-03
Prefilter 2	Corrugated filter (G4)	2	1	PRE-G4-02
Filter	Pleated filter (F9)	3	1	FP-001-F9
Filter CA (5 kg)	Activated carbon filter	4	1	FCA-004

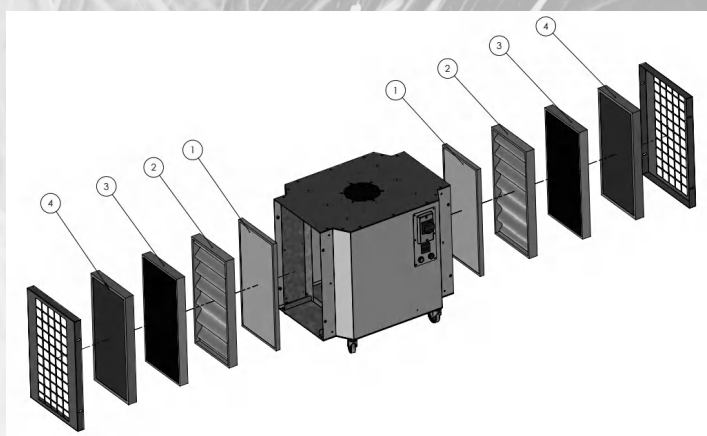

	ST-Action C10	Ref. Drawing	Nr. Parts	Code
Prefilter 1	Steel mesh filter (G2)	1	2	PRE-MA-03
Prefilter 2	Corrugated filter (G4)	2	2	PRE-G4-02
Filter	Pleated filter (F9)	3	2	FP-001-F9
Filter CA (10 kg)	Activated carbon filter	4	2	FCA-004



www.stucchi.net

STUCCHI 1950 S.r.l.

Registered Office: Via Arcisate, 15 – 20157 Milan

Operating Office: Via M.te Bisbino, 24 – 20021
Baranzate (MI)

Tel +39 02/36538904 | Fax +39 02/39292706

www.stucchi.net | info@stucchi.net

Facebook - LinkedIn: Stucchi 1950