




Power Distribution Unit IDEAL

Power

Via Nota Oronte 63
10051 Avigliana – TO – Italy
Mobile +39.340.98.38.700
Mail info@ideal-power.net
www.ideal-power.net
VAT 10869610013
Skpe: boeri_marco

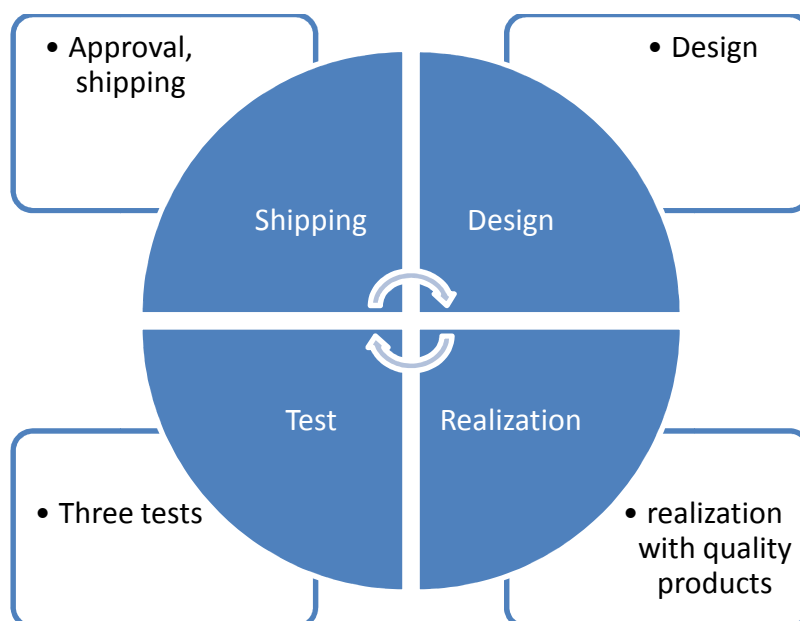

Rack PDU Basic Professional – 19" – 1 unit – 16 e 32 Amper - IEC 60390

Rack power distribution via a single input with multiple output receptacles and distributes power from low amperage single phase circuits solutions. Italian products are ideal for Server and DataCenter.

Rack Power IDEAL IEC60390 with sockets C13 10 Amper e C19 16 Amper.

Code: **2C130-1200****12 sockets C13 DIR**

19"-1U-16A- 12 sockets IEC C13

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	16A
Output connections	12 IEC 320 C13	Power cable	H05 VV-F3g 3x1,5 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	Schuko, IEC-309 16A 2P+N	Cord Length	1,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	10A
Load Capacity	2300 VAC		
Net Weight	4,00 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

Code: **2C130-1600****16 sockets C13 DIR**

19"-1U-16A- 16 socket IEC C13 -

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	16A
Output connections	16 IEC 320 C13	Power cable	H05 VV-F3g 3x2,5 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 16A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	10A
Load Capacity	3200 VAC		
Net Weight	4,20 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	



Code: **2C139-1284** **4 C19 + 8 C13 DIR** 19"-1U-16A- 4 socket C19 + 8 socket C13

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximum Total Current Draw Phase	16A
Output connections	16 IEC 320 C13	Power cable	H05 VV-F3g 3x2,5 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 16A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximum Input Current per phase	10A
Load Capacity	3200 VAC		
Net Weight	4,20 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	



Code: **2C139-0704** **3 C19 + 4 C13 protection** 19"-1U-16A- 4 C19 + 4 C13 circuit breaker

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximum Total Current Draw Phase	10A
Output connections	4 IEC 320 C13 + 3 C19	Power cable	H05 VV-F3g 3x2,5 mm ²
Protection	Circuit breaker		
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 16A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximum Input Current per phase	10A
Load Capacity	300 VAC		
Net Weight	4,30 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	75 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

19" - 1U - 16A m per



Code: **2C190-0605** **6 C19 protection** 19"-1U-16A- 6 socket C19 + circuit breaker

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	16A
Output connections	6 IEC 320 C19	Power cable	H05 VV-F3g 3x2,5 mm ²
Protection	Circuit breaker		
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 16A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	16A
Load Capacity	3200 VAC		
Net Weight	4,30 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	75 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	



Code: **2C190-0600** **6 C19** 19"-1U-16A- 6 socket C19

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	16A
Output connections	6 IEC 320 C19	Power cable	H05 VV-F3g 3x2,5 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 16A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	16A
Load Capacity	3200 VAC		
Net Weight	4,20 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

19" - 1U - 16 A m p e r

Rack Power IDEAL IEC60390 with sockets C13 10 Amper e C19 32 Amper.**Code: 3C130-1600 16 sockets C13 DIR****19"-1U-32A- 16 socket IEC C13 -**

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	32A
Output connections	16 IEC 320 C13	Power cable	H05 VV-F3g 3x6 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 32A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	10A
Load Capacity	6000 VAC		
Net Weight	4,20 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

**Code: 3C139-1284 4 C19 + 8 C13 DIR****19"-1U-32A- 4 socket C19 + 8 socket C13**

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	32A
Output connections	16 IEC 320 C13	Power cable	H05 VV-F3g 3x6 mm ²
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 32A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	32A
Load Capacity	6000 VAC		
Net Weight	4,20 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	100 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

19" - 1U - 32A mper



Code: **3C139-0704** **3 C19 + 4 C13 protection** 19"-1U-32A- 4 C19 + 4 C13 circuit breaker

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	32A
Output connections	4 IEC 320 C13 + 3 C19	Power cable	H05 VV-F3g 3x6 mm ²
Protection	Circuit breaker 32A		
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 32A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	32A
Net Weight	4,30 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	75 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	



Code: **3C190-0605** **6 C19 protection** 19"-1U-32A- 6 socket C19 + circuit breaker

OUTPUT			
Nominal Output Voltage	208V, 230V	Maximun Total Current Draw Phase	32A
Output connections	6 IEC 320 C19	Power cable	H05 VV-F3g 3x6 mm ²
Protection	Circuit breaker 32A		
INPUT			
Nominal Input Volatage	200V ,208V, 230V	Input Freqesncy	50/60 Hz
Inputs Connections	IEC-309 32A 2P+N	Cord Length	2,90 metres
Acceptable Input Voltage	100 – 240 VAC	Maximun Input Current per phase	32A
Net Weight	4,30 Kg	Maximum Height	438 mm
Maximum Width	43,8 mm	Maximum Depth	75 mm
CONFORMANCE			
Regulatory Approvals	CE, RoHs	Standard Warranty	2 years
OPTIONS			
Inputs Connections	Cable stripped		
Standard Lead Time	Usually in stock / 2 - 3 day	Price	

1 9 " - 1 U - 3 2 A m p e r



Photo back side of the PDU - Power cable H05 VV-F3g section 3x2,5 mm² 16 A

Power cable	Power cable H05 VV-F3g - section 3x2,5 mm ² 16 A – 3x6 mm ² 32 A Length power cable 1,90m [standard]
Plug power cable	schuko / C14 / C 20 / IEC 309 / cavo spelato 
Single-phase current	230V – 16A / 32A
Degree of protection	IP 30
Conformance	CE
Dimensioni in mm	19" / 484 mm lunghezza – 1U / 44,2 mm altezza – 100 mm profondità
Peso in kg	2,6 – 3,8 Kg
Standard Warranty	24 mesi
Production	

Other products we manufacture



PDU with ammeter



PDU with C13 Lock

Products standard

Price o the public

code	Amper		socket		Price Euro - € -
1C130-0800	16 A	19" - 1U	8 C13	- direct feed	
2C130-1200	16 A	19" - 1U	12 C13	-	
2C130-1600	16 A	19" - 1U	16 C13 [4 x 4]	- direct feed	
2C139-1284	16 A	19" - 1U	8 C13 + 4 C19	- direct feed	
2C190-0800	16 A	19" - 1U	8 C19	- direct feed	
2C139-0704	16 A	19" - 1U	3 C19 + 4 C13 protection	Circuit breaker 16A	
2C190-0604	16 A	19" - 1U	6 C19 + protection	Circuit breaker 16A	
2EC130-1600	16 A	Vertical	16 C13	- direct feed	
2EC130-2400	16 A	Vertical	24 C13	- direct feed	
2EC139-1604	16 A	Vertical	16 C13 + 4 C19	- direct feed	
2EC139-2004	16 A	Vertical	20 C13 + 4 C 19	- direct feed	

code	Amper		socket		Price Euro - € -
3C130-0800	32 A	19" - 1U	8 C13	- direct feed	
3C130-1200	32 A	19" - 1U	12 C13	- direct feed	
3C130-1600	32 A	19" - 1U	16 C13 [4 x 4]	- direct feed	
3C139-1284	32 A	19" - 1U	8 C13 + 4 C19	- direct feed	
3C190-0800	32 A	19" - 1U	8 C19	- direct feed	
3C139-0705	32 A	19" - 1U	3 C19 + 4 C13 protection	Circuit breaker 16A	
3C190-0605	32 A	19" - 1U	6 C19 + protection	Circuit breaker 16A	
3C190-0600	32 A	19" - 1U	6 C19	- direct feed	
3C190-0607	32 A	19" - 1U	6 C19	Circuit breaker 32A	
3C190-0800	32 A	19" - 1U	8 C19	- direct feed	
3EC130-2400	32 A	Vertical	24 C13	- direct feed	
3EC130-2405	32 A	Vertical	24 C13	Circuit breaker 32A	
3EC139-1604	32 A	Vertical	16 C13 + 4 C19	- direct feed	
3EC139-2004	32 A	Vertical	20 C13 + 4 C 19	- direct feed	

Price reserved for the distributor :

Send request for quotations reserved commerciale@ideal-power.net