




LIFT&GO

CAR LIFTING SOLUTIONS, INDOORS AND OUTDOORS

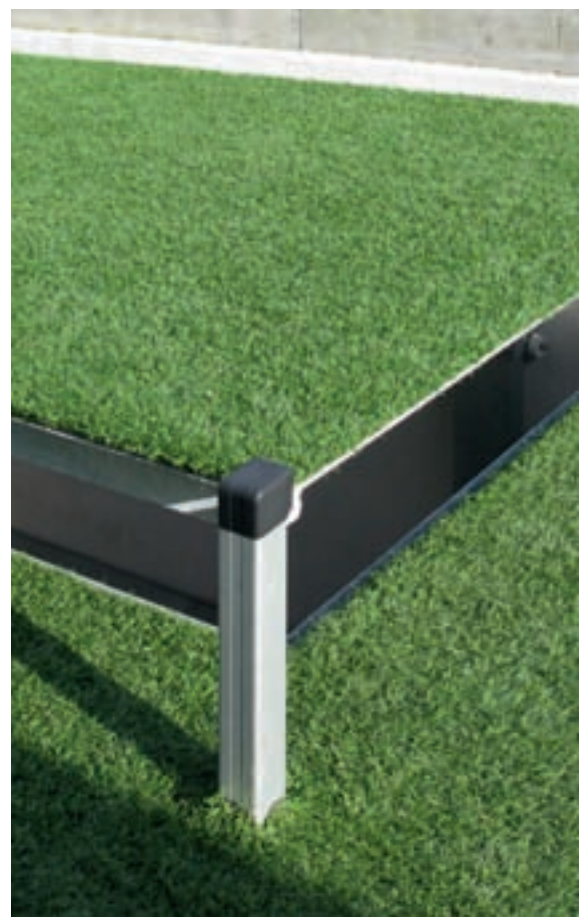

CUSTOMIZED AND TAILOR-MADE SOLUTIONS

FEATURES

Load	max 3500 kg (without roof) max 3000 kg (with roof)
Pit	min 200 mm (without roof) min 800 mm (with roof)
Travel	max 12 m
Headroom	min 2200 mm
Traction	hydraulic, two pistons traction 2:1
Power supply	3 phase 400V
Speed	max 0,15 m/s
Machine room	beside the lift in a separate shaft (in the absence of a special room, both electrical board and hydraulic unit can be placed in a metal cabinet *)
Entrances	single or opposite
Car surface	max 14 m ²
Operation in CAR	hold to run
Operation on LANDINGS	automatic
(remote control possibility *)	
Car operating panels	n. 2 (positioned in the middle of the side walls)
Car protection	H 1200 mm
Reference EU regulations	M.D. 2006/42/EC



FINISHES

Flooring	almond shaped aluminium
COP	inox scotch brite
INDOOR mechanic parts	powder painting RAL9005 (black)
OUTDOOR mechanic parts	cataphoresis and powder painting RAL9005 (black)
Protection	powder painting RAL9005 (black) frame with polycarbonate panels

* optional

SAFETY DEVICES

- 2 couples of LIGHT BARRIERS positioned on the platform, to check the correct positioning of the car
- STOP switch in car
- Car presence sensors (only in presence of people in car)
- IP54 buttons
- Alarm signal
- 2 couples of PHOTOCELLS, for the perimeter shaft control (version with roof)
- Emergency light
- Light in pit
- LED highlighted COP area

OPTIONS


- UPS with emergency batteries in case of power failure
- Multipurpose lights on landings
- Enabling keys in car and on landings
- Bidirectional intercom
- Phone dialler for landline
- GSM card for phone dialler (mobile line)
- Wheel stopping pads to be fixed on the floor
- SECTIONAL and ROLL-UP automatic doors, VERTICAL and HORIZONTAL automatic GATE

LIFT&GO is a hydraulic vehicle lift suitable for travel up to 12 meters. A handy solution aimed to take advantage on the space, thus avoiding useless construction of unsightly, expensive and bulky access ramps.


This vehicle lift is easy to integrate in any environmental context: a garden, a yard, a garage; always with maximum security. Usable either with people in car or by means of a remote controller, this lift can act as a linear park system to be installed both indoors and outdoors.

LIFT&GO is available in two executions, "with roof" and "without roof", and can be equipped with automatic doors and gates.

LIFT&GO is ready to meet any possible requirements. PANTOGRAPH traction is also available.

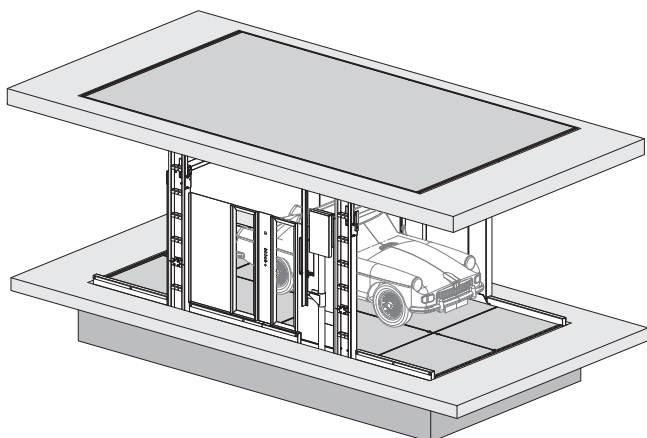

LIFT&GO with roof - lowest floor

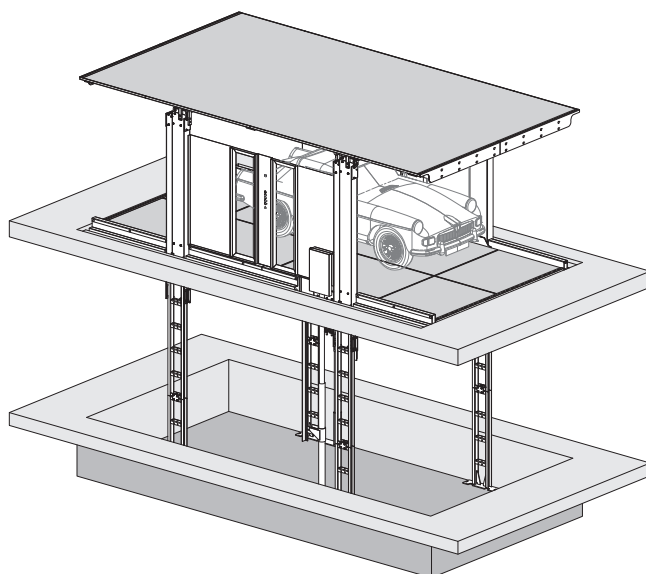

LIFT&GO with roof - upper floor



Glazed shutter GATE



Perfect environmental integration

CARATTERISTICHE

Portata	max 3500 kg (senza tetto) max 3000 kg (con tetto)
Fossa	min 200 mm (senza tetto) min 800 mm (con tetto)
Corsa	max 12 m
Testata	min 2200 mm
Trazione	oleodinamica a due pistoni in taglia rovescia 2:1
Alimentazione	Trifase 400Vca
Velocità	max 0,15 m/s
Locale macchina	da prevedere nelle vicinanze in vano dedicato
(in mancanza di locale dedicato, quadro e centralina possono essere collocati in armadietto metallico di nostra fornitura *)	
Ingressi	singolo o due opposti
Superficie cabina	max 14 m ²
Manovra in CABINA	ad uomo presente
Manovra al PIANO (con possibilità di radiocomando *)	automatica
Colonne pulsanti	2
(posizionate sulle centralmente pareti laterali di cabina)	
Pareti di cabina	da H 1200 mm
Norme di riferimento	D.M. 2006/42/CE




FINITURE

Pedana	alluminio mandorlato
Bottoniera	inox scotch brite
Meccanica per INTERNO	verniciatura a polveri RAL9005 nero
Meccanica per ESTERNO	cataforesi e verniciatura a polveri RAL9005 nero
Pareti	verniciatura a polveri RAL9005 nero con pannelli in policarbonato


SICUREZZE

- 2 coppie di BARRIERE ELETTRONICHE posizionate sul pianale, per verificare la corretta posizione dell'auto
- Interruttore STOP in cabina
- Sensori di presenza dell'auto (solo con uomo a bordo)
- Pulsanti stagni IP54
- Sirena di allarme
- 2 coppie di FOTOCELLULE per il controllo perimetrale del vano (versione con tetto)
- Luce di emergenza
- Illuminazione della fossa
- Luce a LED per illuminare la zona pulsantiera

* in opzione

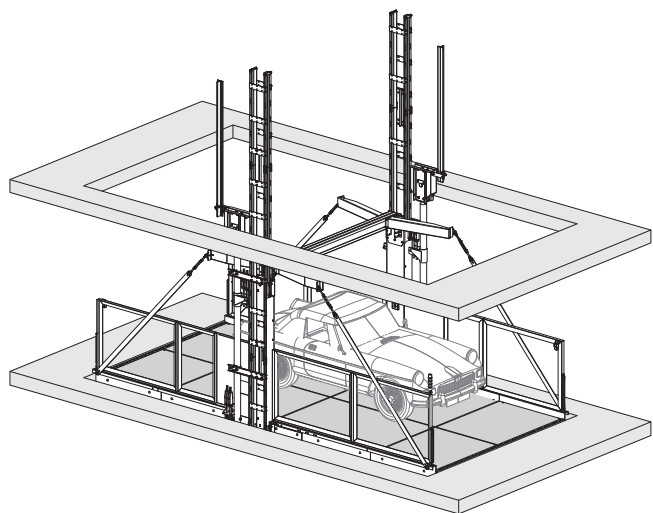

LIFT&GO without roof - lowest floor

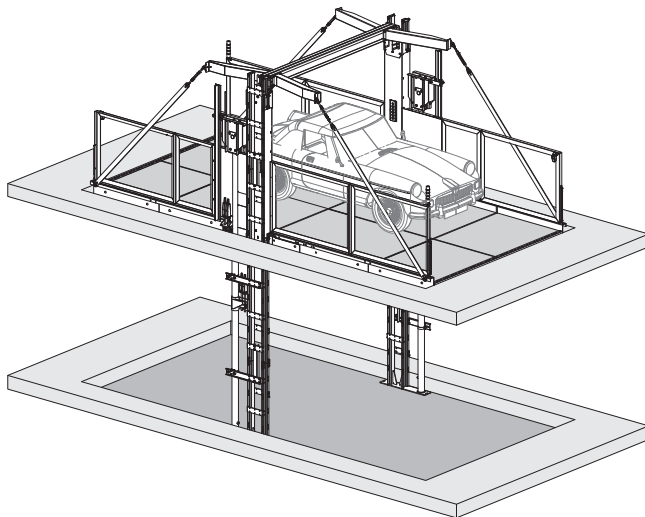

LIFT&GO without roof - upper floor

LIFTINGITALIA S.r.l.

Via Caduti del Lavoro, 16
43058 Bogolese di Sorbolo (Parma), Italy

tel **0521.695311**

fax 0521.695313

info@liftingitalia.it



BR.COM.056_rev.0

Autorized Seller of VERTICO Group

www.verticogroup.it

LIFT & GO

CAR LIFTING SOLUTIONS, INDOORS AND OUTDOORS